
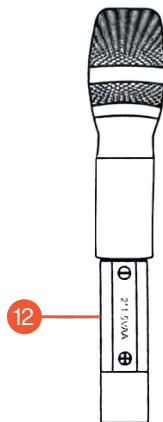
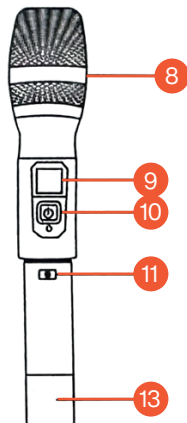


MUSICMATE

USER MANUAL

MusicMate Karaoke SoundWave -
wireless microphone set

PL | EN | DE | ES | PT | CZ | SK | SL
EE | LT | LV | HU | RO | RU | EL

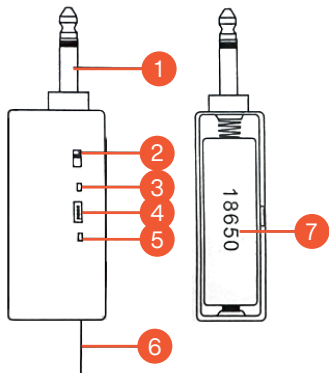

Specyfikacja techniczna:

1. Charakterystyka kierunkowości: jednokierunkowa
2. Typ przetwornika: dynamiczny
3. Rodzaj łączności: bezprzewodowy
4. Czułość mikrofonu: -95dB
5. Zakres dynamiki: 110dB
6. Szumy własne: 90dB
7. Zakres częstotliwości: 2400MHz - 2483MHz
8. Kanał częstotliwości: 10 kanałów, ID kod jest zmieniany losowo
9. Tryb oscylacji: blokada częstotliwości chipa DSP
10. Stabilność częstotliwości: ± 10 ppm
11. Pasmo przenoszenia: 40Hz - 18kHz
12. Zniekształcenia: $\leq 0.5\%$
13. Bateria: 1.5V/AA
14. Godziny pracy: 4-8 godzin
15. Zasięg do 50 metrów

Cechy:

1. Zakres częstotliwości: częstotliwość UHF (Kanał A i Kanał B)
2. 24-bitowy/48kHz wysokiej wydajności procesor audio A/D i D/A
3. Szyfrowane połączenie za pomocą unikalnego identyfikatora urządzenia (ID) z częstotliwością. Dzięki temu, nawet jeśli dwa odbiorniki będą pracować na tej samej częstotliwości, nie będą one zakłócać się nawzajem sygnałem radiowym (RF). Sytuacja taka wpłynie jedynie na zasięg pracy urządzeń, bez wprowadzania zakłóceń w odbieranym sygnale. matyczne wyciszenie i obwód przeciwwzakłóceńowy, aby unikać interferencji i zakłóceń podczas włączania/wyłączania urządzenia.

Opis funkcji odbiornika:

Wtyczka audio 6,35 mm (1), przełącznik zasilania (2), wskaźnik zasilania, wskaźnik ładowania (3), port ładowania DC 5 V (4), wskaźnik sygnału RF (5), antena (6), komora baterii litowej typu 18650 (7).

Opis funkcji nadajnika:

Kapsuła mikrofonu (8), wyświetlacz LED (9), przełącznik mikrofonu (10), przycisk częstotliwości (11), komora baterii (12), antena nadajnika (13), tylna pokrywa (14).

Technical Specifications:

Directional characteristic: unidirectional

Transducer type: dynamic

Connectivity type: wireless

Microphone sensitivity: -95dB

Dynamic range: 110dB

Self-noise: 90dB

Frequency range: 2400MHz – 2483MHz

Frequency channel: 10 channels, ID code changes randomly

Oscillation mode: DSP chip frequency lock

Frequency stability: ± 10 ppm

Transmission bandwidth: 40Hz – 18kHz

Distortion: $\leq 0.5\%$

Battery: 1.5V/AA

Operating time: 4~8 hours

Range: up to 50 meters

Features:

1. Frequency range: UHF frequency (Channel A and Channel B)
2. 24-bit/48kHz high-performance A/D and D/A audio processor
3. Encrypted connection using a unique device ID linked to the frequency. This ensures that even if two receivers operate on the same frequency, they will not interfere with each other's RF signal. Such a situation may only affect the operating range without causing interference in the received signal. Automatic muting and anti-interference circuit to avoid disturbances during device power on/off.

Receiver Function Description:

6.35 mm audio plug (1), power switch (2), power indicator, charging indicator (3), DC 5V charging port (4), RF signal indicator (5), antenna (6), 18650 lithium battery compartment (7).

Transmitter Function Description:

Microphone capsule (8), LED display (9), microphone switch (10), frequency button (11), battery compartment (12), transmitter antenna (13), rear cover (14).

Technical Specifications:

Directional characteristic: unidirectional

Transducer type: dynamic

Connectivity type: wireless

Microphone sensitivity: -95dB

Dynamic range: 110dB

Self-noise: 90dB

Frequency range: 2400MHz – 2483MHz

Frequency channel: 10 channels, ID code changes randomly

Oscillation mode: DSP chip frequency lock

Frequency stability: ± 10 ppm

Transmission bandwidth: 40Hz – 18kHz

Distortion: $\leq 0.5\%$

Battery: 1.5V/AA

Operating time: 4~8 hours

Range: up to 50 meters

Features:

1. Frequency range: UHF frequency (Channel A and Channel B)
2. 24-bit/48kHz high-performance A/D and D/A audio processor
3. Encrypted connection using a unique device ID linked to the frequency. This ensures that even if two receivers operate on the same frequency, they will not interfere with each other's RF signal. Such a situation may only affect the operating range without causing interference in the received signal. Automatic muting and anti-interference circuit to avoid disturbances during device power on/off.

Receiver Function Description:

6.35 mm audio plug (1), power switch (2), power indicator, charging indicator (3), DC 5V charging port (4), RF signal indicator (5), antenna (6), 18650 lithium battery compartment (7).

Transmitter Function Description:

Microphone capsule (8), LED display (9), microphone switch (10), frequency button (11), battery compartment (12), transmitter antenna (13), rear cover (14).

Technical Specifications:

Directional characteristic: unidirectional

Transducer type: dynamic

Connectivity type: wireless

Microphone sensitivity: -95dB

Dynamic range: 110dB

Self-noise: 90dB

Frequency range: 2400MHz – 2483MHz

Frequency channel: 10 channels, ID code changes randomly

Oscillation mode: DSP chip frequency lock

Frequency stability: ± 10 ppm

Transmission bandwidth: 40Hz – 18kHz

Distortion: $\leq 0.5\%$

Battery: 1.5V/AA

Operating time: 4~8 hours

Range: up to 50 meters

Features:

1. Frequency range: UHF frequency (Channel A and Channel B)
2. 24-bit/48kHz high-performance A/D and D/A audio processor
3. Encrypted connection using a unique device ID linked to the frequency. This ensures that even if two receivers operate on the same frequency, they will not interfere with each other's RF signal. Such a situation may only affect the operating range without causing interference in the received signal. Automatic muting and anti-interference circuit to avoid disturbances during device power on/off.

Receiver Function Description:

6.35 mm audio plug (1), power switch (2), power indicator, charging indicator (3), DC 5V charging port (4), RF signal indicator (5), antenna (6), 18650 lithium battery compartment (7).

Transmitter Function Description:

Microphone capsule (8), LED display (9), microphone switch (10), frequency button (11), battery compartment (12), transmitter antenna (13), rear cover (14).

Technical Specifications:

Directional characteristic: unidirectional

Transducer type: dynamic

Connectivity type: wireless

Microphone sensitivity: -95dB

Dynamic range: 110dB

Self-noise: 90dB

Frequency range: 2400MHz – 2483MHz

Frequency channel: 10 channels, ID code changes randomly

Oscillation mode: DSP chip frequency lock

Frequency stability: ± 10 ppm

Transmission bandwidth: 40Hz – 18kHz

Distortion: $\leq 0.5\%$

Battery: 1.5V/AA

Operating time: 4~8 hours

Range: up to 50 meters

Features:

1. Frequency range: UHF frequency (Channel A and Channel B)
2. 24-bit/48kHz high-performance A/D and D/A audio processor
3. Encrypted connection using a unique device ID linked to the frequency. This ensures that even if two receivers operate on the same frequency, they will not interfere with each other's RF signal. Such a situation may only affect the operating range without causing interference in the received signal. Automatic muting and anti-interference circuit to avoid disturbances during device power on/off.

Receiver Function Description:

6.35 mm audio plug (1), power switch (2), power indicator, charging indicator (3), DC 5V charging port (4), RF signal indicator (5), antenna (6), 18650 lithium battery compartment (7).

Transmitter Function Description:

Microphone capsule (8), LED display (9), microphone switch (10), frequency button (11), battery compartment (12), transmitter antenna (13), rear cover (14).

Technical Specifications:

Directional characteristic: unidirectional

Transducer type: dynamic

Connectivity type: wireless

Microphone sensitivity: -95dB

Dynamic range: 110dB

Self-noise: 90dB

Frequency range: 2400MHz – 2483MHz

Frequency channel: 10 channels, ID code changes randomly

Oscillation mode: DSP chip frequency lock

Frequency stability: ± 10 ppm

Transmission bandwidth: 40Hz – 18kHz

Distortion: $\leq 0.5\%$

Battery: 1.5V/AA

Operating time: 4~8 hours

Range: up to 50 meters

Features:

1. Frequency range: UHF frequency (Channel A and Channel B)
2. 24-bit/48kHz high-performance A/D and D/A audio processor
3. Encrypted connection using a unique device ID linked to the frequency. This ensures that even if two receivers operate on the same frequency, they will not interfere with each other's RF signal. Such a situation may only affect the operating range without causing interference in the received signal. Automatic muting and anti-interference circuit to avoid disturbances during device power on/off.

Receiver Function Description:

6.35 mm audio plug (1), power switch (2), power indicator, charging indicator (3), DC 5V charging port (4), RF signal indicator (5), antenna (6), 18650 lithium battery compartment (7).

Transmitter Function Description:

Microphone capsule (8), LED display (9), microphone switch (10), frequency button (11), battery compartment (12), transmitter antenna (13), rear cover (14).

Technical Specifications:

Directional characteristic: unidirectional

Transducer type: dynamic

Connectivity type: wireless

Microphone sensitivity: -95dB

Dynamic range: 110dB

Self-noise: 90dB

Frequency range: 2400MHz – 2483MHz

Frequency channel: 10 channels, ID code changes randomly

Oscillation mode: DSP chip frequency lock

Frequency stability: ± 10 ppm

Transmission bandwidth: 40Hz – 18kHz

Distortion: $\leq 0.5\%$

Battery: 1.5V/AA

Operating time: 4~8 hours

Range: up to 50 meters

Features:

1. Frequency range: UHF frequency (Channel A and Channel B)
2. 24-bit/48kHz high-performance A/D and D/A audio processor
3. Encrypted connection using a unique device ID linked to the frequency. This ensures that even if two receivers operate on the same frequency, they will not interfere with each other's RF signal. Such a situation may only affect the operating range without causing interference in the received signal. Automatic muting and anti-interference circuit to avoid disturbances during device power on/off.

Receiver Function Description:

6.35 mm audio plug (1), power switch (2), power indicator, charging indicator (3), DC 5V charging port (4), RF signal indicator (5), antenna (6), 18650 lithium battery compartment (7).

Transmitter Function Description:

Microphone capsule (8), LED display (9), microphone switch (10), frequency button (11), battery compartment (12), transmitter antenna (13), rear cover (14).

Technical Specifications:

Directional characteristic: unidirectional

Transducer type: dynamic

Connectivity type: wireless

Microphone sensitivity: -95dB

Dynamic range: 110dB

Self-noise: 90dB

Frequency range: 2400MHz – 2483MHz

Frequency channel: 10 channels, ID code changes randomly

Oscillation mode: DSP chip frequency lock

Frequency stability: ± 10 ppm

Transmission bandwidth: 40Hz – 18kHz

Distortion: $\leq 0.5\%$

Battery: 1.5V/AA

Operating time: 4~8 hours

Range: up to 50 meters

Features:

1. Frequency range: UHF frequency (Channel A and Channel B)
2. 24-bit/48kHz high-performance A/D and D/A audio processor
3. Encrypted connection using a unique device ID linked to the frequency. This ensures that even if two receivers operate on the same frequency, they will not interfere with each other's RF signal. Such a situation may only affect the operating range without causing interference in the received signal. Automatic muting and anti-interference circuit to avoid disturbances during device power on/off.

Receiver Function Description:

6.35 mm audio plug (1), power switch (2), power indicator, charging indicator (3), DC 5V charging port (4), RF signal indicator (5), antenna (6), 18650 lithium battery compartment (7).

Transmitter Function Description:

Microphone capsule (8), LED display (9), microphone switch (10), frequency button (11), battery compartment (12), transmitter antenna (13), rear cover (14).

Technical Specifications:

Directional characteristic: unidirectional

Transducer type: dynamic

Connectivity type: wireless

Microphone sensitivity: -95dB

Dynamic range: 110dB

Self-noise: 90dB

Frequency range: 2400MHz – 2483MHz

Frequency channel: 10 channels, ID code changes randomly

Oscillation mode: DSP chip frequency lock

Frequency stability: ± 10 ppm

Transmission bandwidth: 40Hz – 18kHz

Distortion: $\leq 0.5\%$

Battery: 1.5V/AA

Operating time: 4~8 hours

Range: up to 50 meters

Features:

1. Frequency range: UHF frequency (Channel A and Channel B)
2. 24-bit/48kHz high-performance A/D and D/A audio processor
3. Encrypted connection using a unique device ID linked to the frequency. This ensures that even if two receivers operate on the same frequency, they will not interfere with each other's RF signal. Such a situation may only affect the operating range without causing interference in the received signal. Automatic muting and anti-interference circuit to avoid disturbances during device power on/off.

Receiver Function Description:

6.35 mm audio plug (1), power switch (2), power indicator, charging indicator (3), DC 5V charging port (4), RF signal indicator (5), antenna (6), 18650 lithium battery compartment (7).

Transmitter Function Description:

Microphone capsule (8), LED display (9), microphone switch (10), frequency button (11), battery compartment (12), transmitter antenna (13), rear cover (14).

Technical Specifications:

Directional characteristic: unidirectional

Transducer type: dynamic

Connectivity type: wireless

Microphone sensitivity: -95dB

Dynamic range: 110dB

Self-noise: 90dB

Frequency range: 2400MHz – 2483MHz

Frequency channel: 10 channels, ID code changes randomly

Oscillation mode: DSP chip frequency lock

Frequency stability: ± 10 ppm

Transmission bandwidth: 40Hz – 18kHz

Distortion: $\leq 0.5\%$

Battery: 1.5V/AA

Operating time: 4~8 hours

Range: up to 50 meters

Features:

1. Frequency range: UHF frequency (Channel A and Channel B)
2. 24-bit/48kHz high-performance A/D and D/A audio processor
3. Encrypted connection using a unique device ID linked to the frequency. This ensures that even if two receivers operate on the same frequency, they will not interfere with each other's RF signal. Such a situation may only affect the operating range without causing interference in the received signal. Automatic muting and anti-interference circuit to avoid disturbances during device power on/off.

Receiver Function Description:

6.35 mm audio plug (1), power switch (2), power indicator, charging indicator (3), DC 5V charging port (4), RF signal indicator (5), antenna (6), 18650 lithium battery compartment (7).

Transmitter Function Description:

Microphone capsule (8), LED display (9), microphone switch (10), frequency button (11), battery compartment (12), transmitter antenna (13), rear cover (14).

Technical Specifications:

Directional characteristic: unidirectional

Transducer type: dynamic

Connectivity type: wireless

Microphone sensitivity: -95dB

Dynamic range: 110dB

Self-noise: 90dB

Frequency range: 2400MHz – 2483MHz

Frequency channel: 10 channels, ID code changes randomly

Oscillation mode: DSP chip frequency lock

Frequency stability: ± 10 ppm

Transmission bandwidth: 40Hz – 18kHz

Distortion: $\leq 0.5\%$

Battery: 1.5V/AA

Operating time: 4~8 hours

Range: up to 50 meters

Features:

1. Frequency range: UHF frequency (Channel A and Channel B)
2. 24-bit/48kHz high-performance A/D and D/A audio processor
3. Encrypted connection using a unique device ID linked to the frequency. This ensures that even if two receivers operate on the same frequency, they will not interfere with each other's RF signal. Such a situation may only affect the operating range without causing interference in the received signal. Automatic muting and anti-interference circuit to avoid disturbances during device power on/off.

Receiver Function Description:

6.35 mm audio plug (1), power switch (2), power indicator, charging indicator (3), DC 5V charging port (4), RF signal indicator (5), antenna (6), 18650 lithium battery compartment (7).

Transmitter Function Description:

Microphone capsule (8), LED display (9), microphone switch (10), frequency button (11), battery compartment (12), transmitter antenna (13), rear cover (14).

Technical Specifications:

Directional characteristic: unidirectional

Transducer type: dynamic

Connectivity type: wireless

Microphone sensitivity: -95dB

Dynamic range: 110dB

Self-noise: 90dB

Frequency range: 2400MHz – 2483MHz

Frequency channel: 10 channels, ID code changes randomly

Oscillation mode: DSP chip frequency lock

Frequency stability: ± 10 ppm

Transmission bandwidth: 40Hz – 18kHz

Distortion: $\leq 0.5\%$

Battery: 1.5V/AA

Operating time: 4~8 hours

Range: up to 50 meters

Features:

1. Frequency range: UHF frequency (Channel A and Channel B)
2. 24-bit/48kHz high-performance A/D and D/A audio processor
3. Encrypted connection using a unique device ID linked to the frequency. This ensures that even if two receivers operate on the same frequency, they will not interfere with each other's RF signal. Such a situation may only affect the operating range without causing interference in the received signal. Automatic muting and anti-interference circuit to avoid disturbances during device power on/off.

Receiver Function Description:

6.35 mm audio plug (1), power switch (2), power indicator, charging indicator (3), DC 5V charging port (4), RF signal indicator (5), antenna (6), 18650 lithium battery compartment (7).

Transmitter Function Description:

Microphone capsule (8), LED display (9), microphone switch (10), frequency button (11), battery compartment (12), transmitter antenna (13), rear cover (14).

Technical Specifications:

Directional characteristic: unidirectional

Transducer type: dynamic

Connectivity type: wireless

Microphone sensitivity: -95dB

Dynamic range: 110dB

Self-noise: 90dB

Frequency range: 2400MHz – 2483MHz

Frequency channel: 10 channels, ID code changes randomly

Oscillation mode: DSP chip frequency lock

Frequency stability: ± 10 ppm

Transmission bandwidth: 40Hz – 18kHz

Distortion: $\leq 0.5\%$

Battery: 1.5V/AA

Operating time: 4~8 hours

Range: up to 50 meters

Features:

1. Frequency range: UHF frequency (Channel A and Channel B)
2. 24-bit/48kHz high-performance A/D and D/A audio processor
3. Encrypted connection using a unique device ID linked to the frequency. This ensures that even if two receivers operate on the same frequency, they will not interfere with each other's RF signal. Such a situation may only affect the operating range without causing interference in the received signal. Automatic muting and anti-interference circuit to avoid disturbances during device power on/off.

Receiver Function Description:

6.35 mm audio plug (1), power switch (2), power indicator, charging indicator (3), DC 5V charging port (4), RF signal indicator (5), antenna (6), 18650 lithium battery compartment (7).

Transmitter Function Description:

Microphone capsule (8), LED display (9), microphone switch (10), frequency button (11), battery compartment (12), transmitter antenna (13), rear cover (14).

Technical Specifications:

Directional characteristic: unidirectional

Transducer type: dynamic

Connectivity type: wireless

Microphone sensitivity: -95dB

Dynamic range: 110dB

Self-noise: 90dB

Frequency range: 2400MHz – 2483MHz

Frequency channel: 10 channels, ID code changes randomly

Oscillation mode: DSP chip frequency lock

Frequency stability: ± 10 ppm

Transmission bandwidth: 40Hz – 18kHz

Distortion: $\leq 0.5\%$

Battery: 1.5V/AA

Operating time: 4~8 hours

Range: up to 50 meters

Features:

1. Frequency range: UHF frequency (Channel A and Channel B)
2. 24-bit/48kHz high-performance A/D and D/A audio processor
3. Encrypted connection using a unique device ID linked to the frequency. This ensures that even if two receivers operate on the same frequency, they will not interfere with each other's RF signal. Such a situation may only affect the operating range without causing interference in the received signal. Automatic muting and anti-interference circuit to avoid disturbances during device power on/off.

Receiver Function Description:

6.35 mm audio plug (1), power switch (2), power indicator, charging indicator (3), DC 5V charging port (4), RF signal indicator (5), antenna (6), 18650 lithium battery compartment (7).

Transmitter Function Description:

Microphone capsule (8), LED display (9), microphone switch (10), frequency button (11), battery compartment (12), transmitter antenna (13), rear cover (14).

Technical Specifications:

Directional characteristic: unidirectional

Transducer type: dynamic

Connectivity type: wireless

Microphone sensitivity: -95dB

Dynamic range: 110dB

Self-noise: 90dB

Frequency range: 2400MHz – 2483MHz

Frequency channel: 10 channels, ID code changes randomly

Oscillation mode: DSP chip frequency lock

Frequency stability: ± 10 ppm

Transmission bandwidth: 40Hz – 18kHz

Distortion: $\leq 0.5\%$

Battery: 1.5V/AA

Operating time: 4~8 hours

Range: up to 50 meters

Features:

1. Frequency range: UHF frequency (Channel A and Channel B)
2. 24-bit/48kHz high-performance A/D and D/A audio processor
3. Encrypted connection using a unique device ID linked to the frequency. This ensures that even if two receivers operate on the same frequency, they will not interfere with each other's RF signal. Such a situation may only affect the operating range without causing interference in the received signal. Automatic muting and anti-interference circuit to avoid disturbances during device power on/off.

Receiver Function Description:

6.35 mm audio plug (1), power switch (2), power indicator, charging indicator (3), DC 5V charging port (4), RF signal indicator (5), antenna (6), 18650 lithium battery compartment (7).

Transmitter Function Description:

Microphone capsule (8), LED display (9), microphone switch (10), frequency button (11), battery compartment (12), transmitter antenna (13), rear cover (14).



Zużytego sprzętu elektrycznego i elektronicznego oraz baterii i akumulatorów nie można łączyć wraz z innymi odpadami. Informuje o tym symbol przekreślonego kosza umieszczony na opakowaniu produktu. Sprzęt elektryczny i elektroniczny oraz baterie i akumulatory mogą zawierać niebezpieczne substancje, mieszaniny oraz części składowe szkodliwe dla środowiska i zdrowia ludzi. Nieprawidłowe obchodzenie się z nimi lub ich uszkodzenie może doprowadzić do uszczerbku na zdrowiu lub zanieczyszczenia środowiska. Prawidłowe obchodzenie się w gospodarstwie domowym ze zużytym sprzętem elektrycznym i elektronicznym oraz bateriami i akumulatorami pozytywnie przyczynia się do ponownego użycia i odzysku, w tym recyklingu, zużytego sprzętu. Zużyte urządzenia elektryczne i elektroniczne oraz baterie i akumulatory można zwrócić w lokalnych punktach selektywnego zbierania odpadów. Dystrybutor obowiązany jest do nieodpłatnego odbioru zużytego sprzętu pochodzącego z gospodarstw domowych w punkcie sprzedaży, o ile zużyty sprzęt jest tego samego rodzaju i pełnił te same funkcje co sprzęt sprzedawany. Dystrybutor, dostarczając nabywcy sprzęt przeznaczony dla gospodarstw domowych, obowiązany jest do nieodpłatnego odbioru zużytego sprzętu pochodzącego z gospodarstw domowych w miejscu dostawy tego sprzętu, o ile zużyty sprzęt jest tego samego rodzaju i pełnił te same funkcje co sprzęt dostarczony. Dystrybutor prowadzący jednostkę handlu detalicznego o powierzchni sprzedaży w rozumieniu art. 2 pkt 19 ustawy z dnia 27 marca 2003 r. o planowaniu i zagospodarowaniu przestrzennym wynoszącej co najmniej 400 m² poświęconej sprzedaży sprzętu przeznaczonego dla gospodarstw domowych, jest obowiązany do nieodpłatnego przyjęcia w tej jednostce lub w jej bezpośredniej bliskości zużytego sprzętu pochodzącego z gospodarstw domowych, którego żaden z zewnętrznych wymiarów nie przekracza 25 cm, bez konieczności zakupu nowego sprzętu przeznaczonego dla gospodarstw domowych. Produkt został wprowadzony do obrotu po dn. 13 sierpnia 2005 r

Used electrical and electronic equipment and batteries and accumulators must not be mixed with other waste. This is indicated by the crossed-out bin symbol on the product packaging. Electrical and electronic equipment and batteries and accumulators may contain hazardous substances, mixtures and components that are harmful to the environment and human health. Improper handling or damage to them may result in damage to health or environmental pollution. Proper handling of used electrical and electronic equipment and batteries and accumulators in the household contributes positively to the reuse and recovery, including recycling, of used equipment. Used electrical and electronic equipment and batteries and accumulators can be returned to local selective waste collection points. The distributor is obliged to collect used equipment from households free of charge at the point of sale, provided that the used equipment is of the same type and has performed the same functions as the equipment sold. A distributor, when delivering household equipment to a purchaser, is obliged to take back used household equipment free of charge at the place of delivery of such equipment, provided that the used equipment is of the same type and has performed the same functions as the equipment delivered. A distributor running a retail outlet with a sales area within the meaning of art. 2 item 19 of the Act of 27 March 2003 on spatial planning and development of at least 400 m² devoted to the sale of household equipment, is obliged to accept, free of charge, in that outlet or in its immediate vicinity, used household equipment, none of the external dimensions of which exceeds 25 cm, without the need to purchase new household equipment. The product was introduced to the market after 13 August 2005



Producent na wyłączną własną odpowiedzialność oświadcza, że MusicMate Karaoke SoundWave - wireless microphone set jest zgodny z dyrektywą Parlamentu Europejskiego i Rady 2014/30/UE z dn. 26 lutego 2014 r. w sprawie harmonizacji ustawodawstw państw członkowskich odnoszących się do kompatybilności elektromagnetycznej, dyrektywą Parlamentu Europejskiego i Rady 2014/35/UE z dnia 26 lutego 2014 r. w sprawie harmonizacji ustawodawstw państw członkowskich odnoszących się do udostępniania na rynku sprzętu elektrycznego przewidzianego do stosowania w określonych granicach napięcia, oraz dyrektywą Parlamentu Europejskiego i Rady 2011/65/UE z dnia 8 czerwca 2011 r. w sprawie ograniczenia stosowania niektórych niebezpiecznych substancji w sprzęcie elektrycznym i elektronicznym, wraz z dyrektywą delegowaną Komisji (UE) 2015/863 z dnia 31 marca 2015 r. zmieniającą załącznik II do dyrektywy Parlamentu Europejskiego i Rady 2011/65/UE w odniesieniu do wykazu substancji objętych ograniczeniem.

The manufacturer declares under its sole responsibility that MusicMate Karaoke SoundWave - wireless microphone set complies with Directive 2014/30/EU of the European Parliament and of the Council of 18 September 2014 on the protection of natural persons and the environment, 26 February 2014 on the harmonisation of the laws of Member States relating to electromagnetic compatibility, Directive 2014/35/EU of the European Parliament and of the Council of 26 February 2014 on the harmonisation of the laws of Member States relating to the making available on the market of electrical equipment designed for use within certain voltage limits and Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment, together with Commission Delegated Directive (EU) 2015/863 of 31 March 2015 amending Annex II to Directive 2011/65/EU of the European Parliament and of the Council as regards the list of restricted substances.

Importer: Armare S.A.
ul. Grzybowska 87 , Warszawa, 00-844, Polska
Email: serwis@medivon.pl
Marka: Musicmate
Model: MusicMate Karaoke SoundWave - wireless microphone set
SN:06255904119284007
Made in China