




Endure Group 123 (9-36kg)

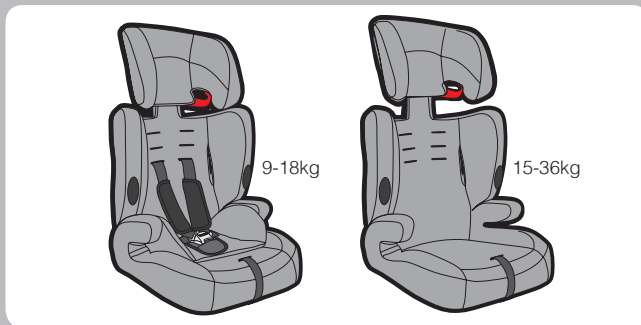


IMPORTANT – KEEP FOR FUTURE REFERENCE

Owner's Manual

Parts list

Fitting Guide

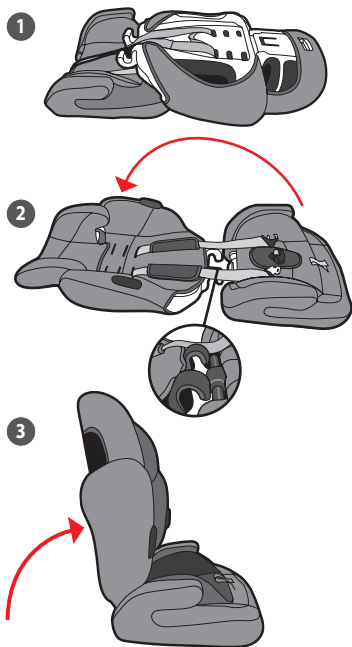


Assembling your Endure 123 Child Restraint.

Once removed from the box, place your new Endure123 on the floor as shown in Diagram 1, left.

Open the two parts out so that the backrest and seat lie flat, as shown in Diagram 1, left.

Open the two parts out so that the backrest and seat lie flat, as shown in Diagram 1, left. Locate the two hooks at the base of the backrest over the bars on the back of the seat base (inset).

Raise the backrest to the vertical position until it snaps into place. Diagram 3

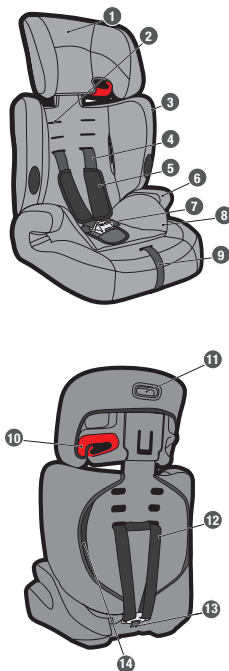

- 1 Headrest
- 2 Slot
- 3 Backrest
- 4 Harness
- 5 Chest pad
- 6 Armrest
- 7 Buckle & crotch pad
- 8 Newborn liner
- 9 Harness adjuster strap
- 10 Belt guide
- 11 Button (headrest height adjustment)
- 12 Harness strap
- 13 Harness connector
- 14 Pocket for instruction manual

Care and maintenance

THESE INSTRUCTIONS ARE IMPORTANT. PLEASE READ CAREFULLY AND RETAIN FOR FUTURE REFERENCE.

It is dangerous to NOT follow the instructions for this product.

Backrest cover removal

First release the elastic strap at the bottom of the backrest cover. Slide the cover off. The cover can now be cleaned.

Headrest and Seat cushion cover removal

Slide the cover off. The cover can now be cleaned.

Washing the covers

Machine wash cover in cold water on delicate cycle and drip-dry.

DO NOT USE BLEACH.

IMPORTANT NOTE

Children should not be left in their child restraint system unattended.

Any luggage or other objects liable to cause injuries in the event of a collision must be properly secured.

This child restraint must not be used without the cover.

The seat cover should not be replaced with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the restraint performance.

The child restraint should be changed when it has been subject to violent stresses in an accident.

It is dangerous to make any alterations or additions to the child restraint without the approval of the competent authority.

Please always fasten the child restraint when it is inside the vehicle.

It is dangerous to not follow closely the installation instructions provided by the child restraint manufacturer. Any straps holding the child restraint to the vehicle should be tight.

Only use contact points and connections described in the instructions and marked on the child restraint.

- 1** This is a "Universal" child restraint. It is approved to ECE Regulation 44.04 for general use in vehicles and will fit most, but not all vehicle seats.
- 2** Only suitable for use with 3 point retractor vehicle safety belts approved to ECE regulation 16 or equivalent standards.
- 3** A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a "Universal" child restraint of this group.
- 4** This child restraint has been declared "Universal: under more stringent conditions than those applied to earlier designs which do not carry this notice.
- 5** If in any doubt, consult either the child restraint manufacturer or the retailer.



Use the Correct Shoulder Strap Height

Please always read the manual before using it. The manual is located in the pocket at the side of the seat.


TOO LOW



TOO HIGH





CORRECT

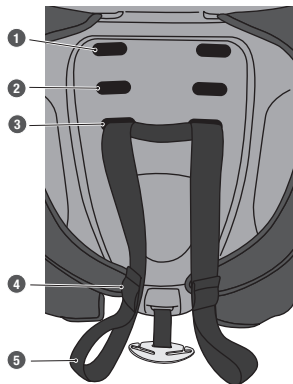

- 1 Top slot
- 2 Middle slot
- 3 Bottom slot
- 4 Top loop
- 5 Bottom loop

Using the Correct Strap Positioning

- 1 For infants and toddlers (9kg to 18kg) use middle 2 and bottom 3 slots and the top 4 loops on the harness strap.
- 2 For older children (up to 18kg) use the top 1 and middle 2 slots and the bottom 5 loops on the harness strap.

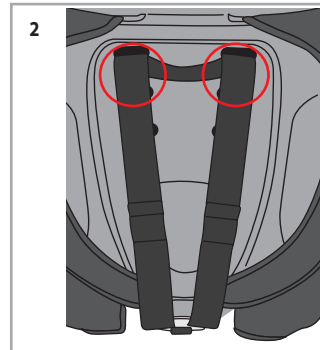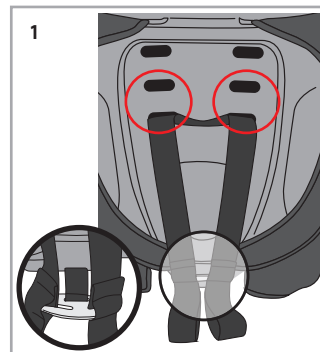

For 9 – 18kg




❶ Changing the Shoulder Strap Height


1 Firstly, loosen the harness.




2 From the rear of the seat find the harness connector.



3 Release the strap from the harness connector.




4 From the front of the seat, pull the strap through the slot in the seat's backrest and chest pad.




**Changing the Shoulder
Strap Height** (continued)


- 5 Thread the chest pad through to the back.



- 6 Thread the chest pad back through the next slot up or down on the cover and backrest, depending on the size of your child.




- 7 Pull the chest pad through to the front of the seat.



Changing the Shoulder Strap Height (continued)




8 Make sure that the rubber side of the chest pads faces the child's chest. Thread the harness strap through the chest pad. Make sure NOT to twist the straps.



9 Re-thread the harness strap back onto the harness connector at the back of the seat.

- *Repeat for the other harness strap.*
- *Ensure both straps are at the same height.*
- *Recommended to keep your child harnessed as long as possible.*

For 9 – 18kg





2 Fitting the Child Restraint with the 3-Point Lap & Diagonal Seat Belt

Position the child restraint on the vehicle's seat.

- 1 Thread the diagonal of the vehicle seat belt underneath the head rest as indicated with the red tag, and the lap strap between the base of the child restraint and the armrest of the child restraint as indicated with the red tag. Pull the vehicle seat belt out as much as it will go so there is lots of slack and feed in through the seat belt route slot in the seat's plastic backrest furthest from the vehicle's seat belt buckle as indicated with the red tag.

- 2 Feed the belt buckle around the back of the child restraint over the harness straps and back through the opposite seat belt route slot, to the front of the child restraint.
- 3 Pull the buckle through the slot and push the child restraint firmly against the backrest of the vehicle's seat.
- 4 Feed the buckle and both the diagonal and lap straps between the armrest and the base of the child restraint as indicated with the red tag.

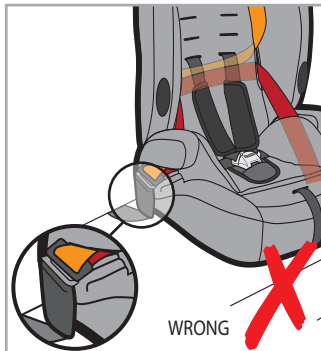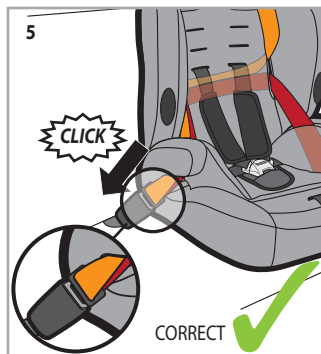


Fitting the Child Restraint with the 3-Point Lap & Diagonal Seat Belt

(continued)

- 5 Fasten the vehicle seat belt into the seat belt buckle making sure the vehicle seat belt and the buckle are in line with each other. Please contact the child restraint manufacturer if in doubt about this point. Finish tightening the vehicle seat belt until there is no slack and the seat is held firmly in place.

- Now you can strap your child into the seat. Make sure the seat belt has not become twisted. Also check that the cover is not impeding the movement or fit of the seat belt webbing in any way. Ensure rigid and plastic parts of child restraint are not liable to become trapped by a movable vehicle seat or vehicle doors.
- To release your child restraint follow the above instructions in reverse order.





3 Fastening the Harness

1 Slot the two metal sections of the buckle connectors together.

2 Slot the two buckle connectors into the slot in the top of the buckle until they "click" into place.

- Always check the harness is correctly locked by pulling the shoulder straps upwards.

- To release the harness, press the red button on the buckle downwards.






4 Tightening the Harness

- 1 Pull the shoulder straps upwards to remove the slack from the lap sections of the harness.
- 2 Pull chest pads down as far as they can go.
- 3 Now pull the adjuster strap until the harness is fully tightened.

- *The harness should be adjusted as tightly as possible without causing discomfort to your child.*

- *Ensure that the lap strap portion of the harness is located as low as possible towards the thighs—not round the tummy.*

- *A loose harness can be dangerous. Check the harness adjustment and tighten each time the child is placed in the seat.*

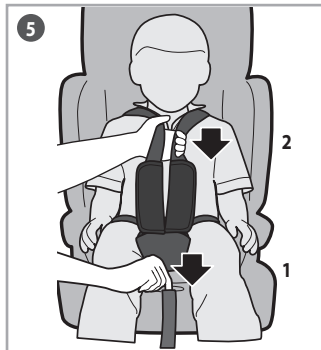


5 Slackening the Harness

- 1 The harness is slackened by pressing the lever (under the seat cover) on the front of the seat.
- 2 Grip the two shoulder straps with one hand. Then press down on the lever underneath the softgoods as you pull the shoulder straps towards you to loosen the harness.

- *Take care when adjusting the shoulder straps that you do not trap the harness adjuster straps as you press the lever down.*


- **TAKE CARE - Check harness straps are not twisted**

For 15 – 36kg




6 Removing the Safety Harness Shoulder Straps


1 Firstly, loosen the harness.



2 From the rear of the seat find the harness connector.




3 Slide both the harness straps off the harness connector at the back of the backrest. From the front of the seat, pull the straps through the slots in the seat backrest and fabric cover.



7 Removing the Safety Harness Lap Straps and Crotch Strap


- 1 From underneath the seat, locate the three webbing retainer buckles. Turn the buckles on their narrowest end and feed them, complete with webbing straps, through the slots in the base of the seat, then through the slots in the fabric cover. The lap straps and crotch strap can then be removed completely from the seat.



Store the newborn liner, chest pads, buckle/crotch pads and harness straps in a safe place.

For 15 – 36kg

1

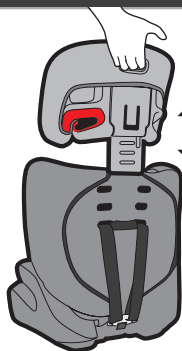

2



8 Adjusting the Headrest

- According to the child's height, the headrest can be adjusted up or down.

- 1 Put one hand on the backrest. Pull the button in the headrest with your other hand.
- 2 Move the headrest up or down as required ensuring your child's head is centred on the headrest.


Check to make sure it is clicked into one of the six height positions by pulling up on head support.

The red seat belt guides must be level with, or just above, the shoulders, as shown by the dotted line.

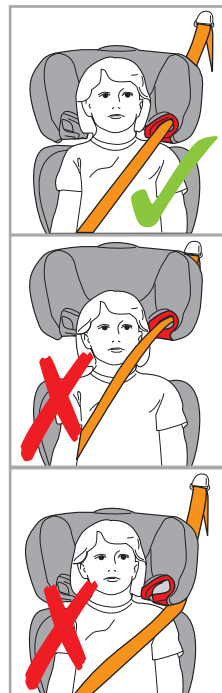

For 15 – 36kg

1




9 Fitting the Child Restraint using the Adult Seat Belt

IMPORTANT: Before fitting the seat remove the shoulder straps, crotch strap and lap strap. (See pages 13 and 14)


- 1 Place the child restraint onto the vehicle's seat. Ensure that the backrest of the seat is pushed firmly against the backrest of the vehicle's seat. Place the child in the child restraint.
- 2 Place the vehicle seat belt across the child and child restraint making sure that the diagonal vehicle seat belt goes through the vehicle seat guide in the headrest as indicated with the red tag.
- 3 Ensure that the lap strap portion of the harness is located as low as possible towards the thighs - not around the tummy.
- 4 Place the vehicle seat belt under the armrest closest to the buckle as indicated with the red tag.

2




4

3

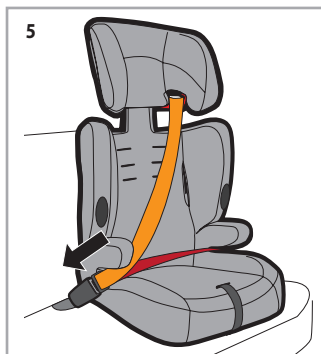

Fitting the Child Restraint using the Adult Seat Belt (continued)

- 5 Fasten the vehicle seat belt into the seat belt buckle making sure the vehicle seat belt and the buckle are in line with each other as indicated with the red tag.
- 6 Finish by tightening the vehicle seat belt until there is no slack and the child and child restraint are held firmly in place.

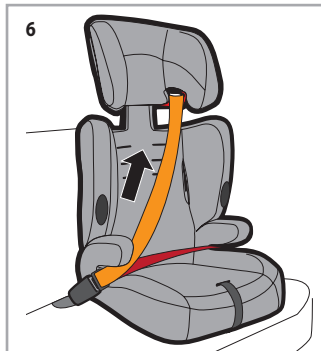

- *Make sure the seat belt has not become twisted.*
- *Also check that the cover is not impeding the movement or fit of the vehicle seat belt in any way.*



Product of:

Wonder Brands Limited
Room 1004, 151 Gloucester Road
Wanchai, Hong Kong

Customer Service
www.gracobaby.eu
www.graco.co.uk
www.gracobaby.pl

For UK and ROI
Customerservices.uk@gracobaby.eu
+44 0800 952 0063