





W	46 926	46 858	48 416	46 925
X	48 275	13 967	48 347	13 952
Y	08 565	08 565	08 565	08 565
Z	06 768	---	---	---

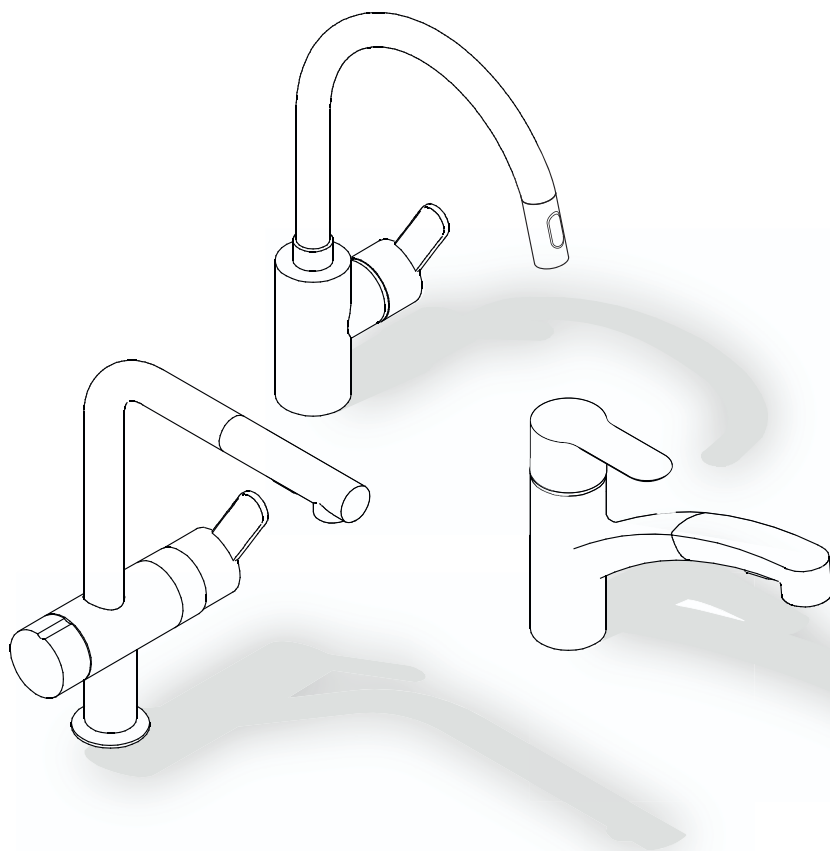

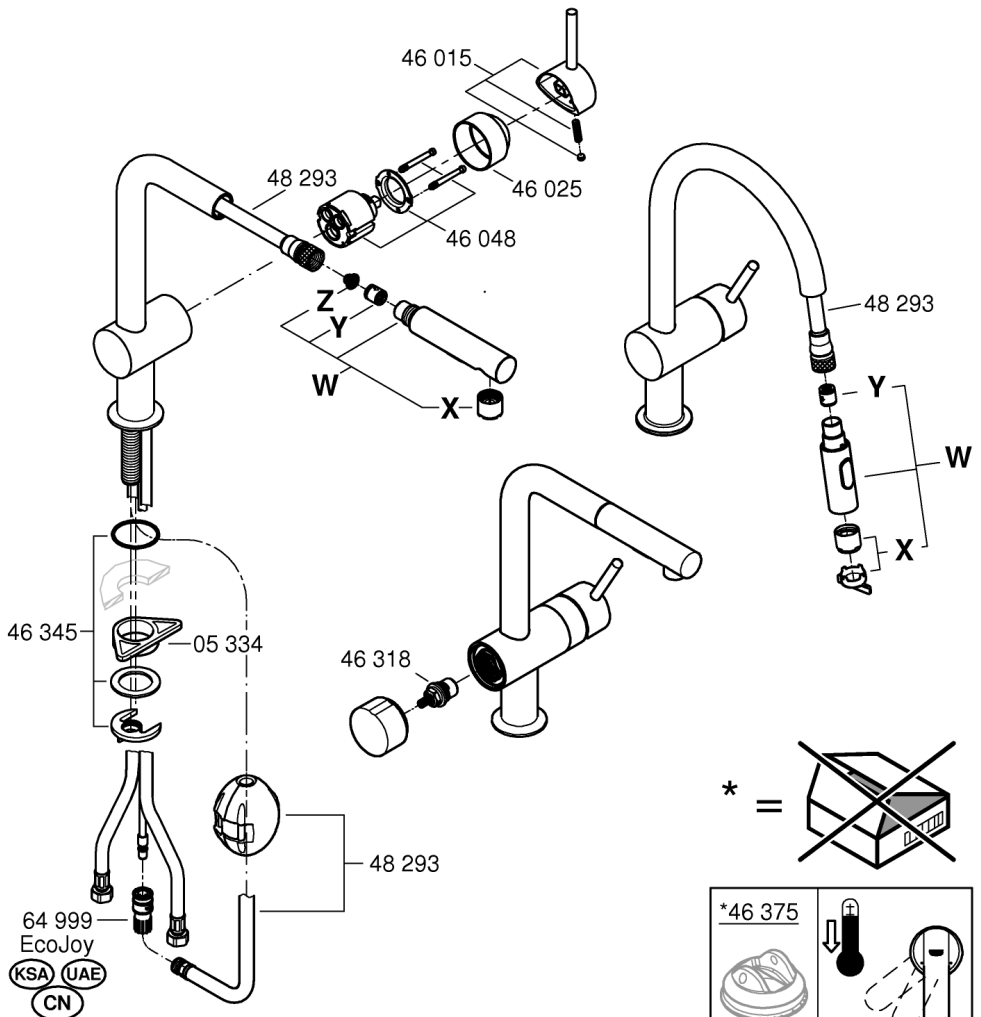

DIN EN
806

DIN EN
1717

DIN
1988



bar



°C


max.
10

0,5


5
1

max.
70°




60°




2,5mm
3mm




1

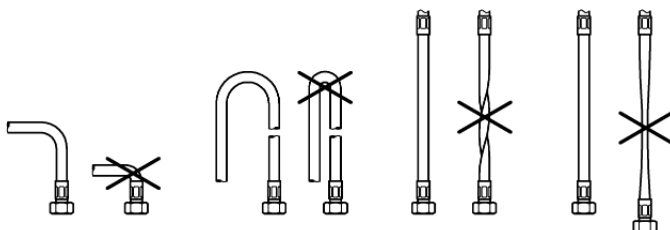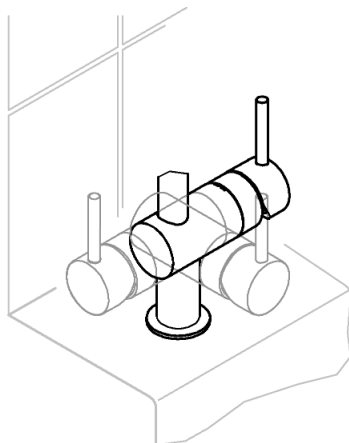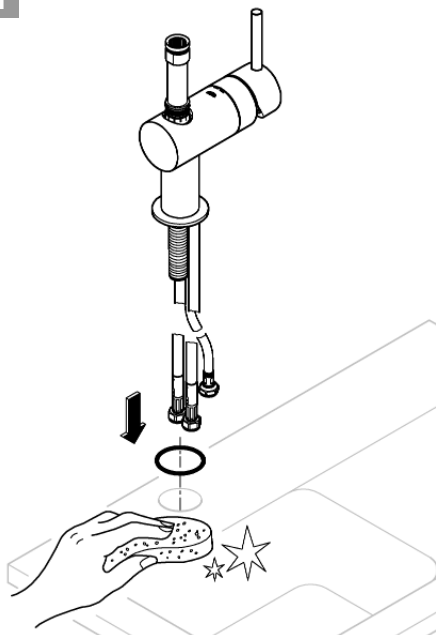





2

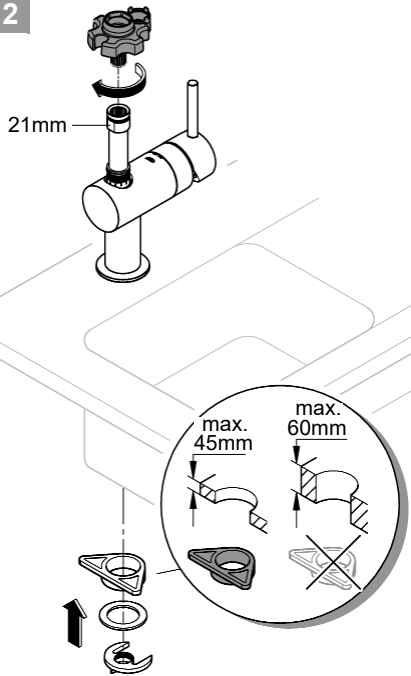

3


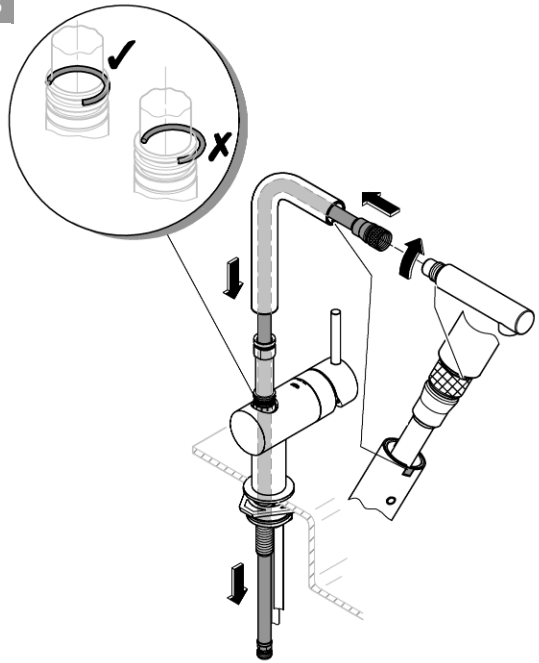



4a

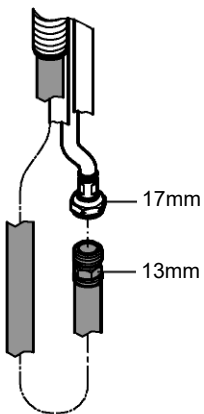


4b

KSA **UAE** **CN** EcoJoy

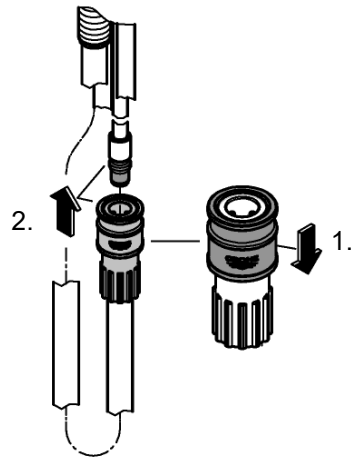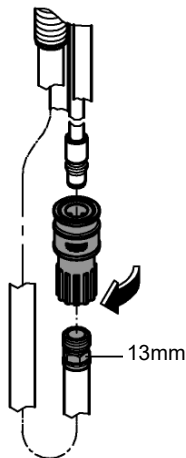




5

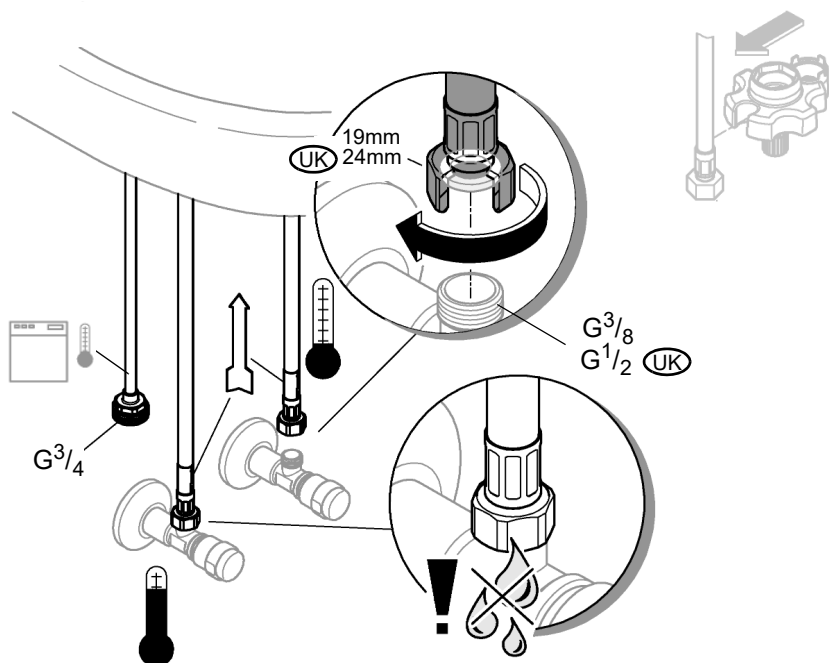

6

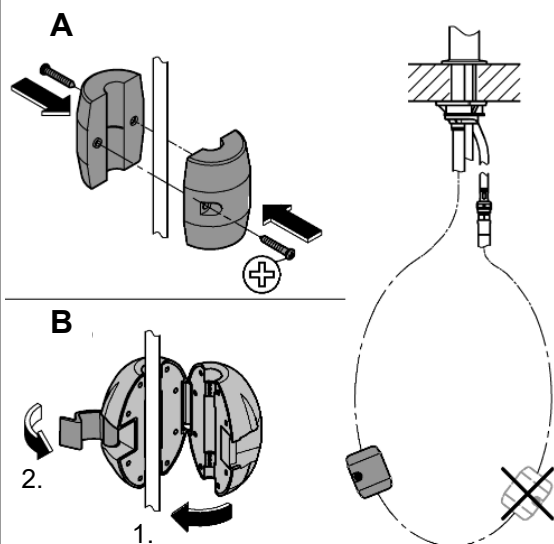

7

