

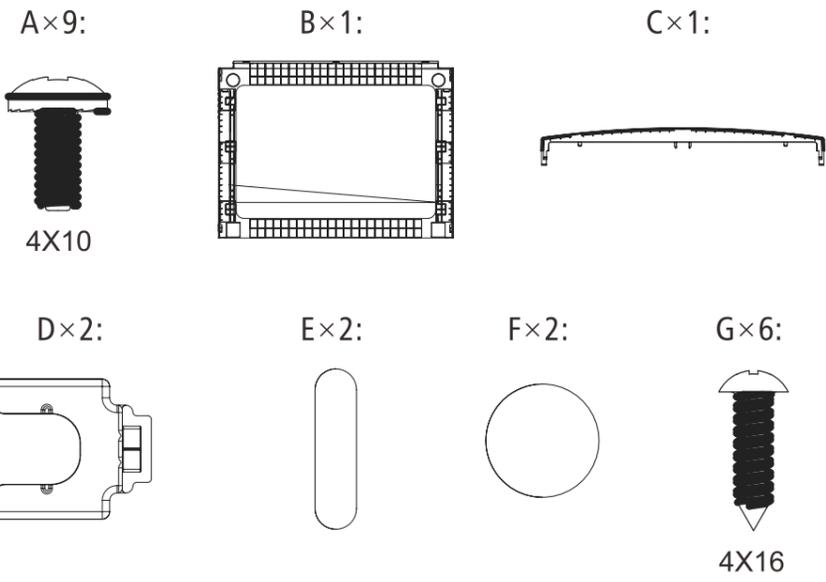


1

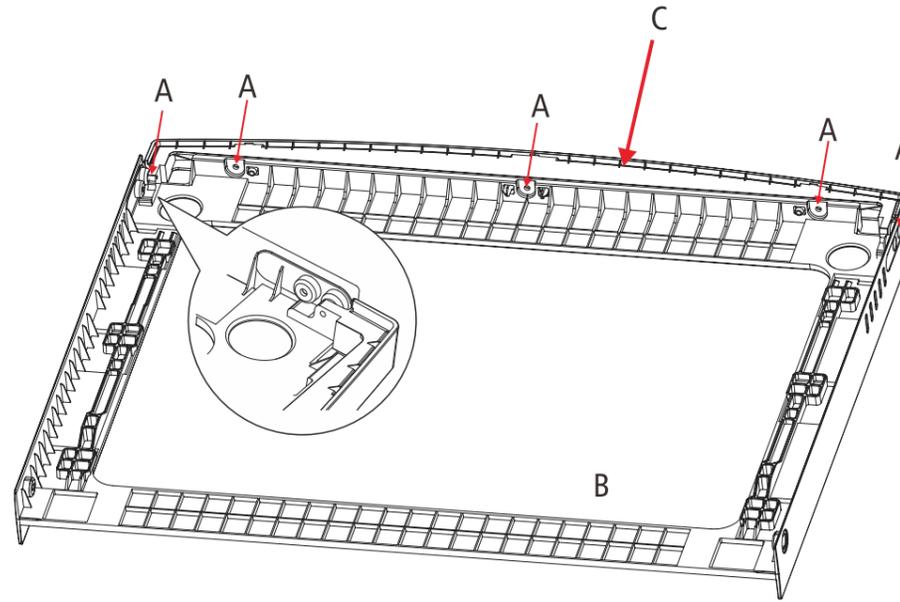


⚠ Make sure that the power supply is disconnected before installation !

2

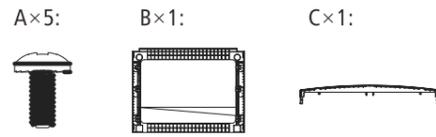


Torque should not exceed 5 N.m

3

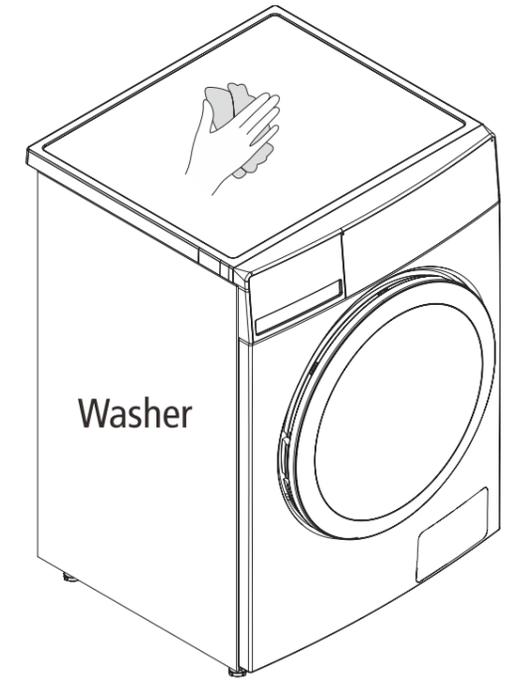


Clean the top cover of washer

4

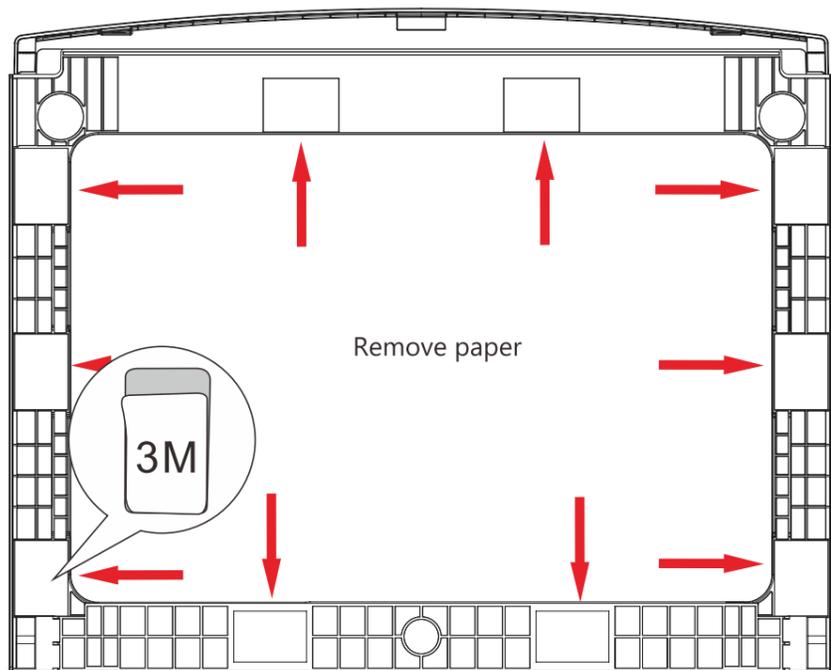


5

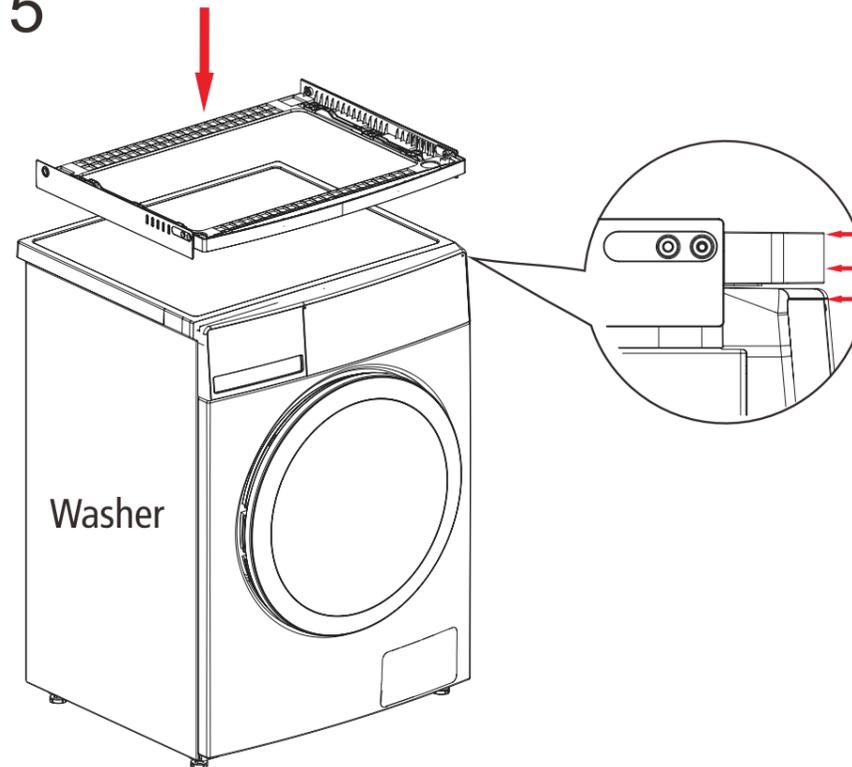

Note: Align the bracket B and the washer before attaching the bracket B


6

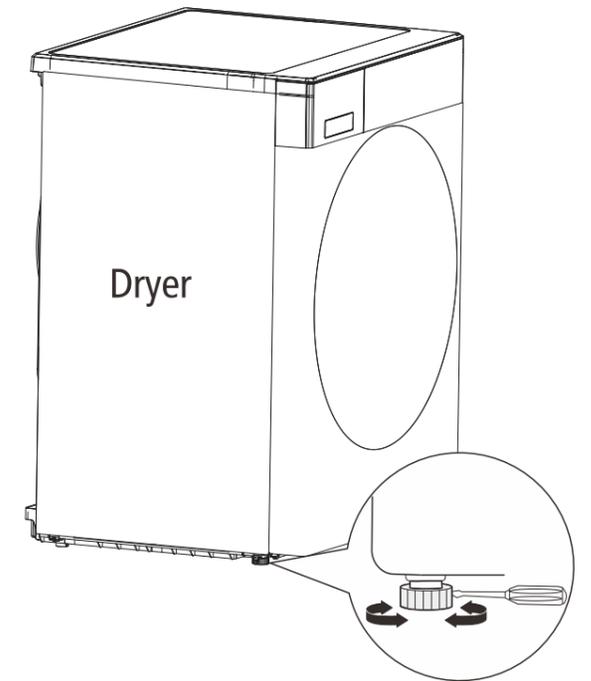

If the dryer base is not metal, adjust the adjusting feet of the dryer to the lowest position directly

7

D×2:

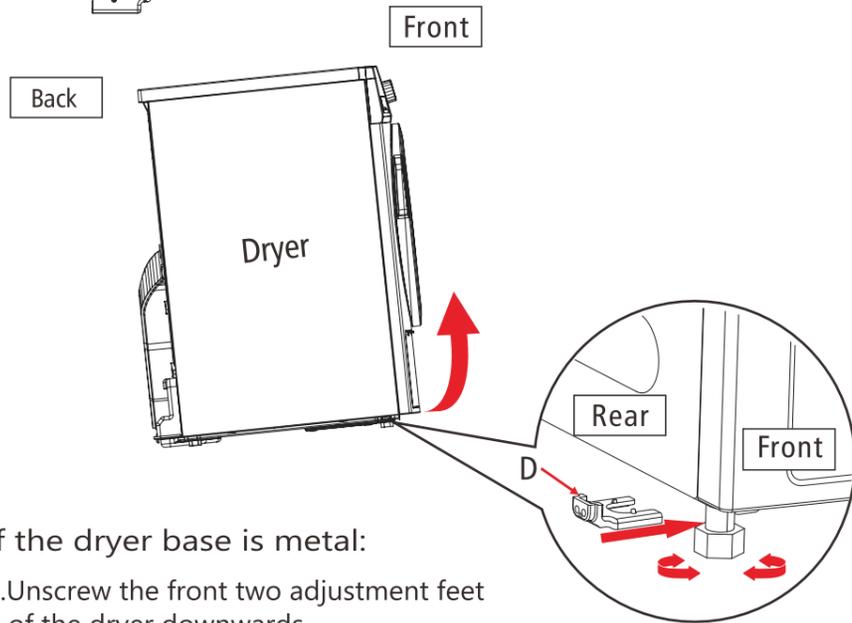


If the dryer base is metal:

1. Unscrew the front two adjustment feet of the dryer downwards
2. Insert two fixing parts D
3. Tighten the two adjustment feet upwards

8

Back


Front

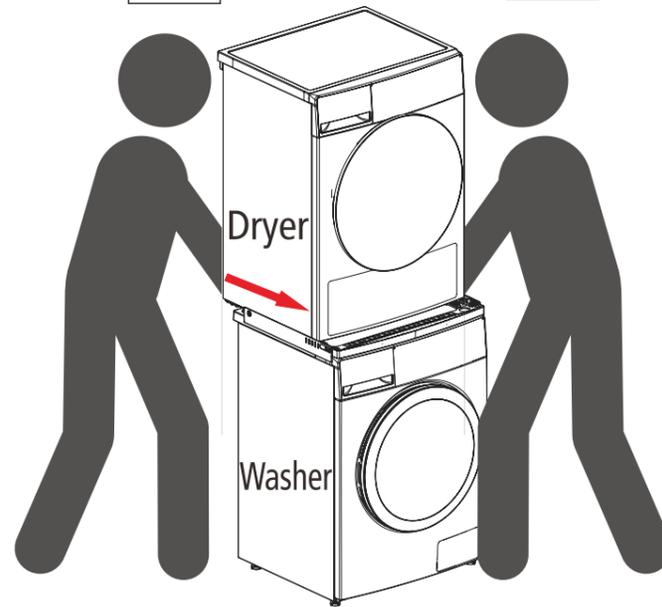

Place the dryer at the back of the top of the washer, and then push the dryer forward until the hole matches the hole

9


G×4:

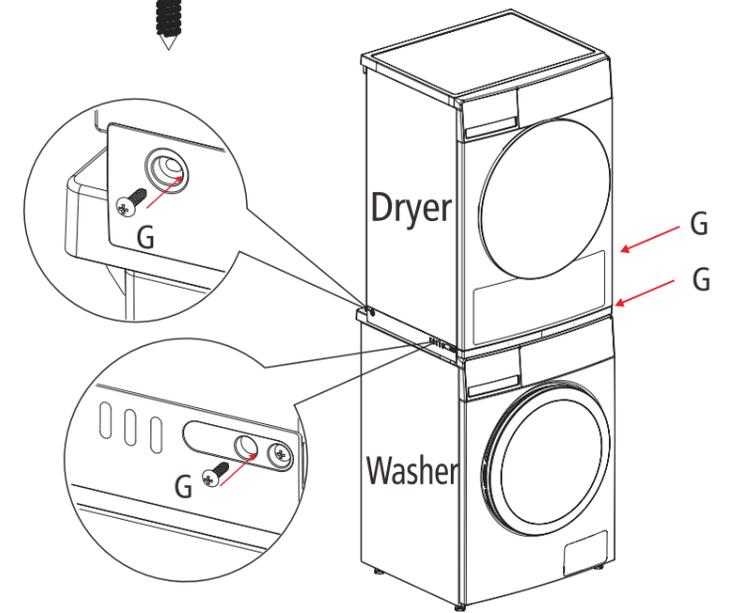

If the dryer base is not metal, tighten the front and rear four screws G

10

A×2:

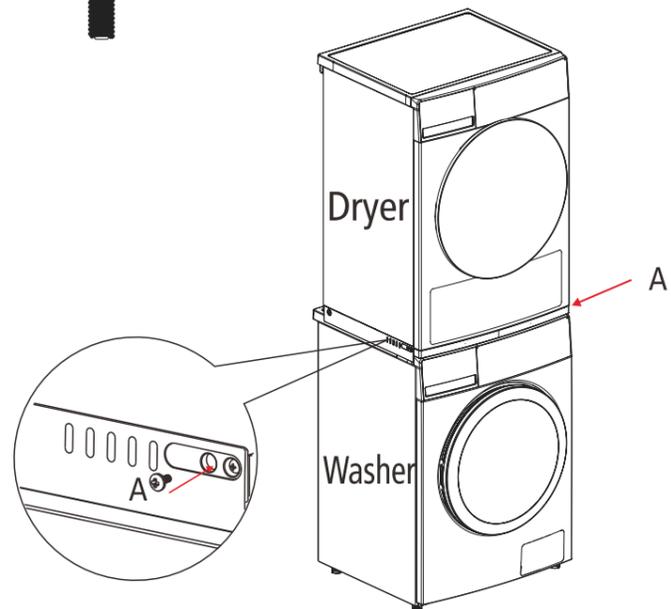

If the dryer base is metal, only tighten the front two screws A.

11

E×2:

F×2:

